


## ABS Drain Set I

4 piece set is designed for use in photographic sinks. 3" body to 1½" male thread. Includes 3" plug. Recommended over stainless steel for sealing ability and corrosion resistance.




70415

ECP403D ABS Drain Set I

## Washer I Washing Well Attachment

Circulates clean water by means of a ported dome which cannot be clogged by prints or film. ABS Drain Set I required.



ECP405D Washer I 70420

## Faucet Set I

Chrome plated brass, 10" spout, hose fitting, non-corrosive, easy to install. Complete directions included. 5 year limited warranty.



ECP409D Faucet Set I 70810

## Spray Set I

Designed for cleaning and washing. Spray held, 4 foot hose and faucet attachments.



ECP410D Spray Set I 70510

## ABS Sink Plumbing Installation Pacs

### Installation Pac I (Single Drain Sink Set)

Faucet (4" center, 8" gooseneck), Drain Waste Set, Connectors, Spray Set I, ABS Drain Set I, 6ft. ABS Tubing

### Installation Pac II (Dual Drain Sink Set)

Faucet (4" center, 8" gooseneck), Dual Drain Waste Set, Connectors, Spray Set I, (2) ABS Drain Set I, 6ft. ABS Tubing

ECP452D Single Sink Drain Set 70210  
ECP453D Dual Drain Sink Set 70220

## Stainless Sink Installation Pac

S/S 5" drain standpipe, (2) four foot ½" S/S FIP supply flex-hoses, (4) chrome nipples, (2) chrome shutoff ball valves, black ABS drain waste tail piece, P-Trap, 90° coupling elbow, six foot ABS 1½" tubing.

ECP454D Stainless Sink Installation Pac 61320

## Water Filter I - Cold

Easy to install, cleans water. Reinforced Polypropylene, clear transparent body. ¾" FPT 125°F/125 PSI rated. One 20 micron sediment cartridge included. Five year limited warranty.



ECP426D

ECP427D

## Water Filter II - Hot

Glass reinforced nylon. Rated 200°F/200 P.S.I. rated. Red body, ¾" NPT inlet and outlet. One 20 micron sediment cartridge included. Five year limited warranty.

ECP426D Water Filter I- cold 75310  
ECP427D Water Filter II- hot 75320

## Water Filter Elements

¾" standard spun poly cartridge fits 99% of all units. Polypropylene spun (string wound) cartridges. Recommended for photo processing. They have high wet strength and holding capacity. Glued cellulose (paper) cartridges are not recommended for photo applications. Charcoal carbon filters are recommended for color chemistry and drinking water.



ECP081320 box/30, 20 micron 75411  
ECP428 pk/2, 20 micron 72200  
ECP429 pk/2, 5 micron 72250  
ECP424D box/30, 5 micron 75441  
ECP75451 box/20, 5 micron 75451

## Water Filter Package

Contains: One each hot & cold water filter housings, 2- 20 micron sediment cartridges, 2 shut-off valves & fittings for ¾" pipe, ½" pipe reducers & teflon tape, 2 stainless steel wall brackets, 4ft. of 5/8" clear flexible hose.

ECP080361 Water Filter Package 75550

## O-Ring Replacements for Water Filters I & II

ECP080327 4 Buna N rubber O-rings 75530

## Water Filter Spanner Wrench- Nylon



ECP430D Water Filter Wrench 75510


## Wall Mount Bracket

Stainless steel. Fits 99% of water filters with 3/8" - 3/4" pipe thread.

ECP431D Wall Mount Bracket 75520

## Premier/Doran Filter Cartridge

A 20 micron accordion-fold paper filter. This type of paper filter may be flushed with running water to clean for reuse in an emergency. This cannot be done with rapped or string type filters.



EAR309 Filter Cartridge DFC-20

**FOR FAST DELIVERY CALL TOLL FREE!**

EAST  
1-888-ARGRAPH  
OR 1-800-526-6290

WEST  
1-888-WESTARG  
OR 1-800-323-9069

## Water Temp II

Gives constant temperature readings while water flows. Has on/off control of hot/cold water supply. Fits 99% of faucets, swivels 360° degrees. Has water strainer in fitting. Large 3" dual scale thermometer, adjustable needle, probe contact of thermometer built-in. Ready to be inserted into plumbing. 5 year warranty.




ECP445 Delta Water Temp II

65010

## Flo-Temp Thermometer Well

Attaches to faucet (or with adapter). Built-in filter. Holds Premier/Samigon/Weston type dial thermometers. Guarantees temperature control at the faucet. Operator adjusts temperature at water source. Angled for easy reading. Nylon with brass fittings.

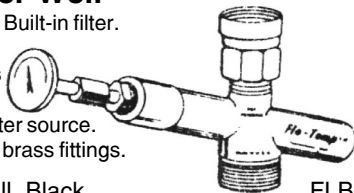


EPF901 Thermometer Well, Black

FLB

## Aqualizer

Magnetic water conditioner & lime fighter. In line for 70% more strength. Two in-Line Force Fields. Stops algae. No maintenance. As cold water passes through the intense magnetic field created by the Aqualizer the characteristics of the water are changed so that the algae and lime will no longer be a problem. 3/4" MPT.



ECP656D Water Conditioner/Lime Fighter

79010

## Flowmeter I

Conserves water. Rated 150 PSI. Stainless steel float and guide rod. Extremely accurate ± 2%. Extra high pressure, space age flowmeter with Buna N, O Rings. Accurately measures .5 to 5 GPM of water. Saves water, pays for itself. 1/2" MPT.



ECP437D Flowmeter I

78110

## Vacuum Breaker I

Meets plumbing codes and EPA compliance regs. Prevents backflow. Anti-siphon 1/2" IPC. Chrome.



ECP434D Vacuum Breaker I

78210

## Hose Bibb Vacuum Breaker II

Screw on spout. Anti-siphon prevents reverse flow of contaminated water back to portable water supply. Required by most U.S. City plumbing Codes and EPA Compliance Regs. Fire, freezing, natural disasters, accidents, and broken or cracked pipes below level of vacuum breaker can siphon chemicals, solvents, etc. into water system. GHT fittings on both ends.



ECP435D Hose Bibb Vacuum Breaker II


78230

## Water Temperature Control Panels

All models are fully assembled, plumbed, and lab tested. Controls are 1/2" FPT. 3" dial thermometer with calibration screw. Some units include a vacuum breaker which prevents backflow and stop check valves which provide one-way flow of water. Models 15 and 25 have 3/4" GHT for water outlets. Models 800 and 1000 have 1/2" FPT for water outlets.

### Model 15: Manual Water Panel

- Economical temperature control
- Hot & cold water ball valves
- Flow control ball valve
- 1/2" NPT inlet connections, 3/4" GHT outlet
- 20 micron water filter cartridge



ECP468D Manual, model 15

65115

### Model 25

- Thermostatic mixing valve for accurate temperature control
- Flow control ball valve
- 1/2" NPT inlet connections, 3/4" GHT outlet
- Adjustable spring check valves
- 20 micron water filter cartridge




ECP470D Model 25

65125

### Model 800

- Hot & cold water filtration
- Vacuum breaker
- .5 - 5 GPM flowmeter
- Adjustable spring check valves
- Two- 20 micron water filter cartridges

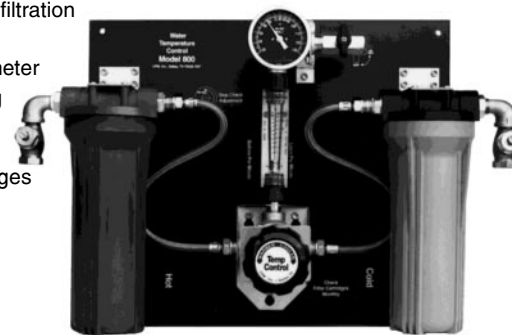

ECP466D Model 800 water control, Regular Flow

66800

ECP472D Model 800 water control, Low Flow

65150

PERSONAL SERVICE IS OUR #1 PRIORITY



East: 111 Asia Place, Carlstadt, NJ 07072

(201) 939-7722

FAX: (201) 939-7782

West: 2710 McCone Ave., Hayward, CA 94545


(510) 293-0575

FAX: (510) 293-0565

## CPM/Delta ECO 1™ Basic Unit Thermostatic Water Control

*Protects the environment with one way valves, conserves water with low flow mixers, and uses non-chromium and non-toxic UL sealers.*

- Two adjustable spring checkstops for one way water flow
- 3" dial thermometer rated 30°F to 130°F with recalibration screw
- One volume control ball valve
- High impact ABS plastic housing



ECP095000 ECO 1 Basic Unit, Regular Flow, 1-7 GPM 65155  
 ECP65160 ECO 1 Basic Unit, Low Flow, 5-1.5 GPM 65160

## ECO Vacuum Breaker with Fittings

Prevents backflow of water or chemistry into potable water supply. Meets all U.S. and Canadian plumbing codes.

ECP095100 ECO Vacuum Breaker 65165.

## Premier Chem-Trol Temperature Control

Controls color chemistry for use with drums or trays. Universal water hose connects to household water faucets for temperature control of water jacket that holds (4) pint size graduates (not included) and (3) 4 oz. size graduates (included).

Thermometer included to control temperature with hot and cold water mix. High impact plastic is insulated to hold temperatures.



EAR251 Chem-Trol WJ-4

## Premier

### Dev-Tec Color Print Processor, Model 100B



- Makes one 8 x 10, two 8 x 10, or one 11 x 14, as well as smaller prints in color or B&W.
- Daylight operation.
- 6oz. flip top chemical containers marked in 2oz. increments.
- For use with one shot or retrieval processing systems.
- Water bath tray included for precise temperature control.
- Simultaneous pour-in and empty.
- Economical, uses only 2 or 4 oz. of chemicals in most cases.
- Compatible with most color chemistry kits.
- Flexible twist lock end cap assembly for fast, easy cleaning.
- Optional motor drive Model MD-50 available.
- Optional temperature control Model TC-750 available.
- Complete with instructions.

EAR280 For 8 x 10 and 11 x 14 prints Model 100-B

### Dev-Tec Photo Processor Temperature Control



- Compact, completely submersible unit for precise temperature control of photo processor water bath.
- Creates a recirculating system for photo lab when used with inexpensive submersible pump and plastic container. Conserves water and energy.
- Fully adjustable for all common processing temperatures up to 150°F.
- Automatic safety shut off when removed from water.
- All solid state electronic control cast in epoxy, no thermostat or switch contacts to burn or get wet.
- Light emitting diode (LED) indicator light for easy adjustment.
- Provides complete error-free system for color print processing when used with Dev Tec Processors and Motor Drives.
- 750 watts 120 VAC grounded outlet only.

EAR289 Temp Control for model 100B & 200A TC-750

### Dev-Tec Processing Drums

For daylight processing of prints. Designed for 8 x 10 prints, but can be converted to 11 x 14 tube. May be hand agitated or used with the Premier Drum Agitator (Shown but not included). Ends are removable so it's easy to clean.



EAR290 8 x 10 Processing Drum w/end caps 1310  
 EAR291 11 x 14 Center Tube Extension Only 1311

**FOR FAST DELIVERY CALL TOLL FREE!**

EAST  
**1-888-ARGRAPH**  
 OR 1-800-526-6290

WEST  
**1-888-WESTARG**  
 OR 1-800-323-9069